


68B 6" x 6" - 16 Gauge Hand Notcher

This fine machine, industry's most popular through the years, combines precision and convenience at the lowest price of any full size notcher.

The upper blades are reversible which means that the 68B will both splay and pierce cut. In splay cutting the shearing action begins at the outside edge of the blank. When pierce cutting, shearing originates at the apex or in the body of the material, making possible coping cuts. (See illustration)

Special combination tab or box flange blades are available. These blades are slotted as well as being reversible and will give a 3/8" tab in mild steel as heavy as 18 gauge.

The gages offer a full 6 inches of surface for easy accurate squaring.

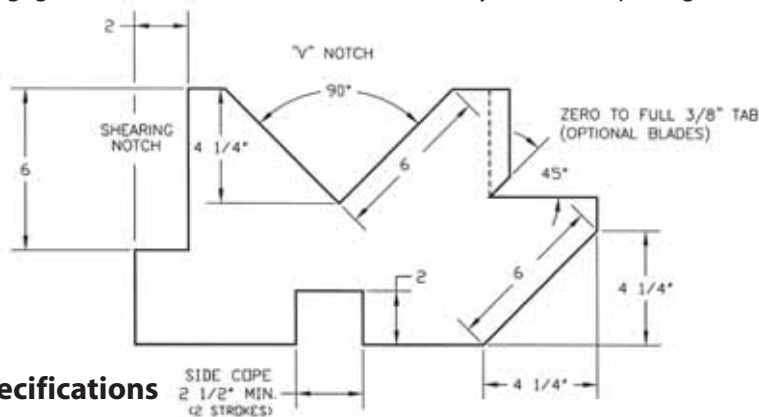

Specifications

Capacity in mild steel	16 ga.
Capacity in stainless steel	20 ga.
Maximum notch in one cut	6" x 6"
Handle length	22"
Height	14"
Width	18"
Depth	14"
Gage size	6-1/4" x 2"
Table size	12" x 18"
Blade apex to front of table	6"
Throat Depth	4-3/4"
Mounting	Bench or stand (optional)
Weight	84 lbs (Shipping weight 100lbs)

Standard equipment	ATS Blades (Reversible uppers) Ground gage plate (table) 2 Gauge stops (45 degree mitre on one end) ISO-CAP Handle
--------------------	--

Options:	Combination ATS 3 way tab blades for pierce, splay or tab notching (up to 3/8") High Carbon High Chrome (HCHC) blades Angle Iron Stand
----------	--



68B

- **Cut all shearable material steel, aluminum, plastic, rubber**
- **Miters, notches, shears, squares, trims**
- **Reversible upper blades for coping, piercing, and splay cutting**
- **Tab or box flange notching with optional blades. Up to 3/8"**
- **No set up - quick precise cuts**
- **16 Gauge capacity**
- **ISO-CAP Way wear adjustment - Allows for infinite wear adjustment.**
- **Made in the USA**



805 Prim Road
Colchester, Vermont 05446

(877) 294-1400 • Fax (877) 294-8600
www.kidder-mfg.com • sales@kidder-mfg.com